


FIGURE MRA-11a

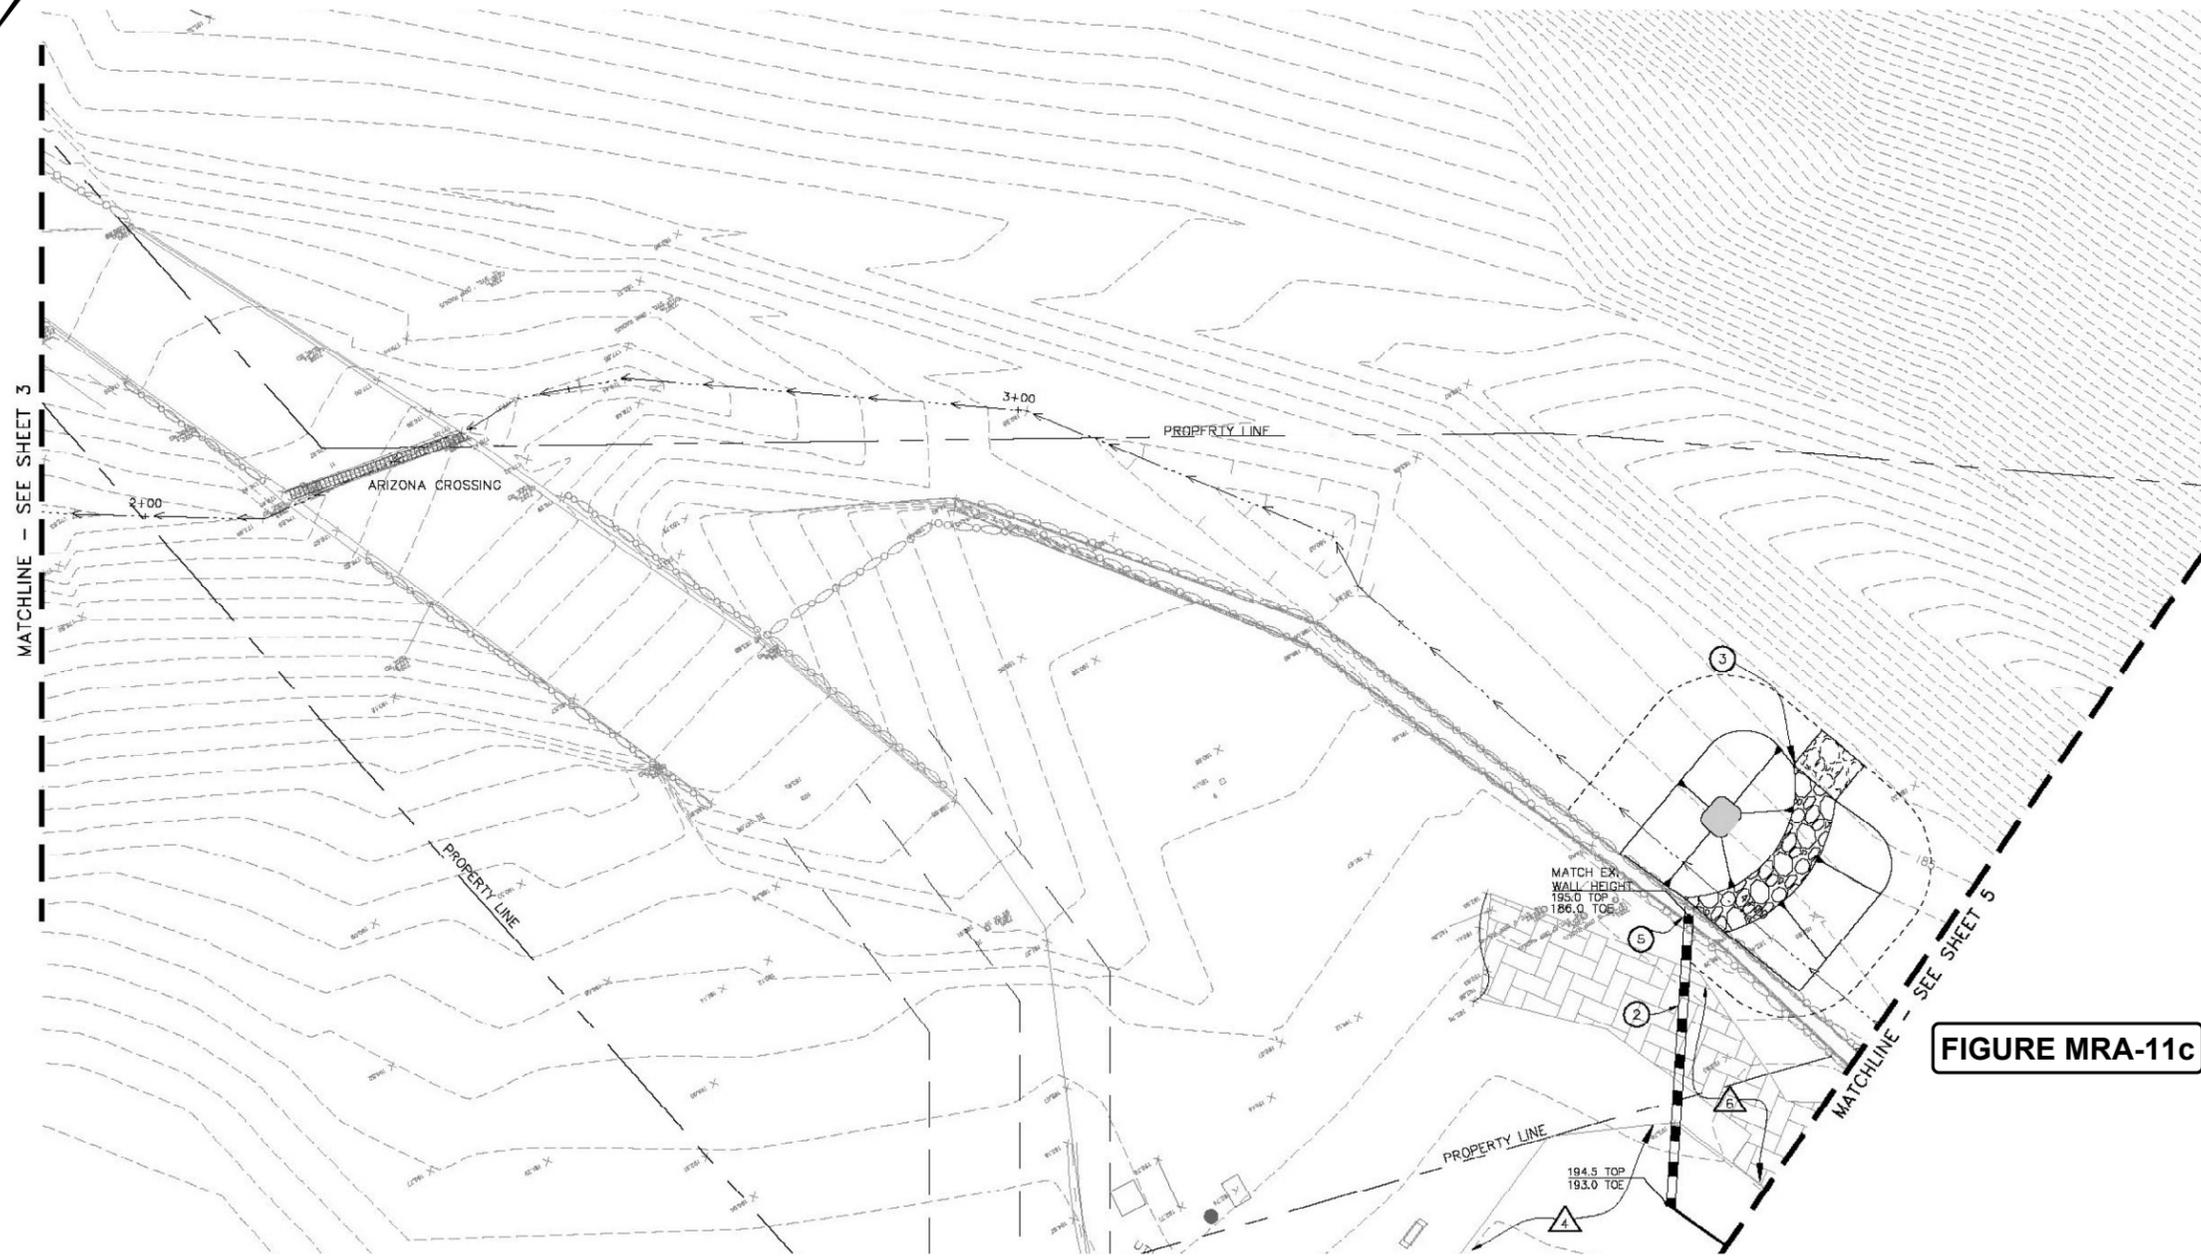


CONSTRUCTION NOTES:

- ① CONSTRUCT VEGETATED SLOPE AT 2:1 MAX SLOPE WITH ROCK TOE PROTECTION.
- ② CONSTRUCT RETAINING WALL PER DETAIL A ON SHEET 10 (HEIGHT TO BE VERIFIED IN THE FIELD WITH THE ENGINEER).
- ③ CONSTRUCT BOULDER BERMS PER DETAILS B THROUGH E, ON SHEET 11.
- ④ CONSTRUCT RIPARIAN TERRACE TWO FEET ABOVE CREEK BOTTOM.
- ⑤ CONSTRUCT RETAINING WALL TRANSITION STRUCTURE.
- ⑥ PROTECT EXISTING STRUCTURE IN PLACE.
- ⑦ PROVIDE TOE ROCK AS AVAILABLE FROM EXCAVATED MATERIALS.

DEMOLITION NOTES:

- ⚠️ 1 REMOVE EXISTING PORTION OF RETAINING WALL TO 1'± ABOVE TOE AT EXISTING WALL.
- ⚠️ 2 REMOVE EXISTING CONCRETE BOTTOM PAVING.
- ⚠️ 3 REMOVE EXISTING GABION, ALL METAL TO BE REMOVED, ROCK SHALL REMAIN.
- ⚠️ 4 REMOVE EXISTING TENNIS COURT.
- ⚠️ 5 REMOVE EXISTING TREE (MARKED WITH "X").
- ⚠️ 6 REMOVE EXISTING BRICK PAVERS.

FIGURE MRA-11c

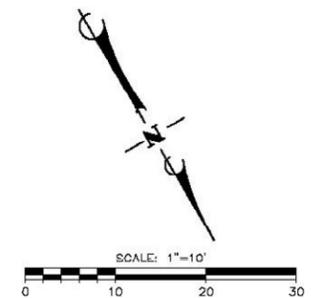

SOURCE: Penfield & Smith 2010