

**CONSTRUCTION NOTES**

- 3 CONSTRUCT LARGE CAMPSITE PER LOCATION AND GRADING SHOWN HERE ON. CONSTRUCT LAYOUT PER DETAIL A ON SHEET 35.
- 4 CONSTRUCT SMALL CAMPSITE TYPE 1 PER LOCATION AND GRADING SHOWN HERE ON. CONSTRUCT LAYOUT PER DETAIL B ON SHEET 35.
- 6 CONSTRUCT RESTROOM.
- 8 CONSTRUCT INFORMATION KIOSK.
- 10 CONSTRUCT PICNIC AREA.
- 11 CONSTRUCT ASPHALT CONCRETE PARKING LOT PER DETAIL H ON SHEET 36.
- 12 CONSTRUCT RETAINING WALL PER DETAIL D ON SHEET 35.
- 15 CONSTRUCT 3" PVC WATER LINE PER DETAIL K ON SHEET 36 AND CONNECT TO EXISTING WATER LINE.
- 17 CONSTRUCT HOSE BIBB.
- 18 CONSTRUCT 4" FIREWATER LINE PER DETAIL K ON SHEET 36.
- 21 CONSTRUCT DRAINAGE SUMP.
- 33 CONSTRUCT OR IMPROVE EXISTING ROADWAY TO 12 FOOT WIDE AG PER DETAIL H ON SHEET 36.
- 42 INSTALL FIRE HYDRANT.
- 43 INSTALL BACKFLOW PREVENTION DEVICE.
- 48 INSTALL DRINKING FOUNTAIN.
- 49 INSTALL WILDLAND FIRE HYDRANT AND 100' FIRE HOSE WITH REEL PER DETAIL P ON SHEET 36.
- 52 INSTALL KIOSK/DROP BOX FOR PARKING FEE COLLECTION.

**LATIGO CANYON SITE IMPROVEMENTS EARTHWORK ESTIMATE**


	CUT (C.Y.)	FILL (C.Y.)	WALL LENGTH (FT)
PARKING AREA	300	0	50
RESTROOM AREA	110	0	50
CAMPING AREA	5	10	35
SUBTOTAL	415	10	145
20% CONTINGENCY	85	5	30
<b>TOTAL</b>	<b>400</b>	<b>15</b>	<b>175</b>

**TRAIL EARTHWORK ESTIMATE**

	CUT (C.Y.)	FILL (C.Y.)	TRAIL LENGTH (FT)	WALL LENGTH (FT)
LATIGO TO SOLSTICE TRAIL	1,170	250	7,100	3,700
20% CONTINGENCY	240	50	-	740
<b>TOTAL</b>	<b>1,410</b>	<b>300</b>	<b>7,100</b>	<b>4,440</b>

**LEGEND**

- W PROPOSED WATER LINE
- U COMMON UTILITY TRENCH
- FW PROPOSED FIREWATER LINE
- PROPOSED RETAINING WALL
- VEGETATION MANAGEMENT BOUNDARY

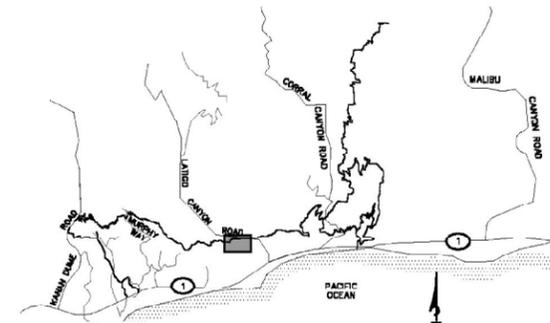

**KEY MAP**  
SCALE: N.T.S.



SOURCE: Penfield&Smith 2010

**FIGURE 8.1-21**

**Redesign Alternative - Latigo Trailhead Concept Plan**