


CONSTRUCTION NOTES

1. CONSTRUCT TRAIL OR IMPROVE EXISTING TRAIL TO MINIMUM 5' WIDE PER DETAIL C ON SHEET 35.
4. CONSTRUCT SMALL CAMPSITE TYPE 1 PER LOCATION AND GRADING SHOWN HERE ON. CONSTRUCT LAYOUT PER DETAIL B ON SHEET 35.
5. CONSTRUCT TENT CABIN STRUCTURE PER LOCATION AND GRADING SHOWN HERE ON.
6. CONSTRUCT RESTROOM.
8. CONSTRUCT INFORMATION KIOSK.
11. CONSTRUCT ASPHALT CONCRETE PARKING LOT PER DETAIL H ON SHEET 36.
12. CONSTRUCT RETAINING WALL PER DETAIL D ON SHEET 35.
13. CONSTRUCT 10,000 GALLON WATER TANK PER DETAIL G ON SHEET 36.
17. CONSTRUCT HOSE BIBB.
18. CONSTRUCT 4"± FIREWATER LINE PER DETAIL K ON SHEET 36.
21. CONSTRUCT DRAINAGE SUMP.
23. INSTALL BIKE RACK. BIKE RACK SHALL BE GRID RACK 6400 SERIES GALVANIZED BY SANS OR APPROVED EQUIVALENT.
25. CONSTRUCT FUEL BREAK/OVERFLOW PARKING WITH PERMEABLE SURFACE.
26. CONSTRUCT COMMON UTILITY TRENCH PER DETAIL K ON SHEET 36.
36. CONSTRUCT BIOSTRIP.
37. CONSTRUCT 4"± PVC WATER LINE PER DETAIL K ON SHEET 36 AND CONNECT TO EXIST WATER LINE.
38. CONSTRUCT ASPHALT CONCRETE ROAD PER DETAIL H ON SHEET 36.
39. INSTALL EMERGENCY FIRE SHELTER.
40. INSTALL FIRE TRUCK STORAGE SHED.
42. INSTALL FIRE HYDRANT.
43. INSTALL BACKFLOW PREVENTION DEVICE.
49. INSTALL WILDLAND FIRE HYDRANT AND 100' FIRE HOSE WITH REEL PER DETAIL P ON SHEET 36.
51. INSTALL DRINKING FOUNTAIN.
52. INSTALL KIOSK/DROP BOX FOR PARKING FEE COLLECTION.

LEGEND

-  PROPOSED RETAINING WALL
-  VEGETATION MANAGEMENT BOUNDARY

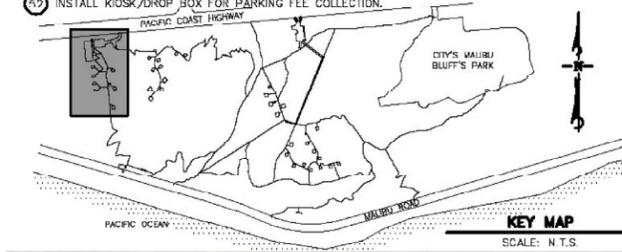

CAMPING AND PARKING AREA 1

SOURCE: Penfield&Smith 2010

FIGURE 8.1-26

Redesign Alternative - Malibu Bluffs Conservancy Property Parking and Camp Area 1 Concept Plan