

CONSTRUCTION NOTES

- ⑩ CONSTRUCT PICNIC AREA.
- ⑪ CONSTRUCT ASPHALT CONCRETE PARKING LOT PER DETAIL H ON SHEET 36.
- ⑫ CONSTRUCT RETAINING WALL PER DETAIL D ON SHEET 35.
- ⑫ INSTALL KIOSK/DROP BOX FOR PARKING FEE COLLECTION.

LATIGO CANYON SITE IMPROVEMENTS EARTHWORK ESTIMATE


| | CUT (C.Y.) | FILL (C.Y.) | WALL LENGTH (FT) |
|-----------------|------------|-------------|------------------|
| PARKING AREA | 300 | 0 | 50 |
| SUBTOTAL | 300 | 0 | 50 |
| 20% CONTINGENCY | 80 | 0 | 10 |
| TOTAL | 380 | 0 | 60 |

TRAIL EARTHWORK ESTIMATE

| | CUT (C.Y.) | FILL (C.Y.) | TRAIL LENGTH (FT) | WALL LENGTH (FT) |
|--------------------------|-------------|-------------|-------------------|------------------|
| LATIGO TO SOLSTICE TRAIL | 1,170 | 250 | 7,100 | 3,700 |
| 20% CONTINGENCY | 240 | 50 | - | 740 |
| TOTAL | 1410 | 300 | 7,100 | 4,440 |

LEGEND

- W PROPOSED WATER LINE
- U COMMON UTILITY TRENCH
- FW PROPOSED FIREWATER LINE
- PROPOSED RETAINING WALL
- VEGETATION MANAGEMENT BOUNDARY

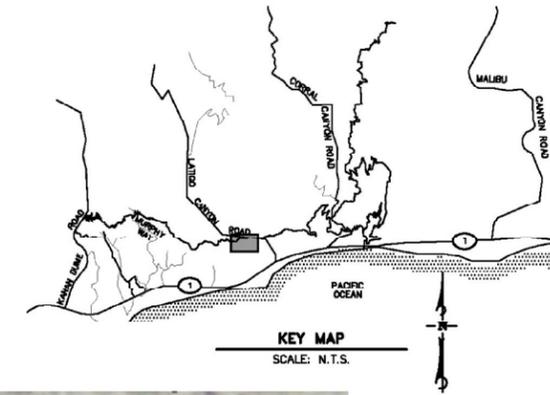

PARKING AND DAY USE PLAN

SOURCE: Penfield&Smith 2010