



FOR REDUCED PLANS  
ORIGINAL SCALE IN INCHES

**DUDEK**  
621 CHAPALA STREET  
SANTA BARBARA, CA 93101  
(805) 963-0851

NO.	DATE	REVISIONS	APPD.


**PS**  
111 East Victoria Street,  
Phone: (805) 963-9532

**Petfield & Smith**  
Engineers • Surveyors • Planners  
• Construction Management •  
SANTA BARBARA, CA 93101  
Fax: (805) 966-9801

DESIGN: JHC CHECKED: BEF  
PROJECT ENGINEER: **BRET FOSTER** DATE: \_\_\_\_\_  
R.C.E. **48,267** (EXP. **06-30-12**)

ADOPTED ON AUGUST 23, 2010 BY SANTA MONICA MOUNTAINS CONSERVANCY AND MOUNTAINS RECREATION AND CONSERVATION AUTHORITY.  
CERTIFIED ON \_\_\_\_\_  
BY CALIFORNIA COASTAL COMMISSION: \_\_\_\_\_

# MALIBU PARKS PUBLIC ACCESS ENHANCEMENT PLAN PUBLIC WORKS PLAN CONCEPT

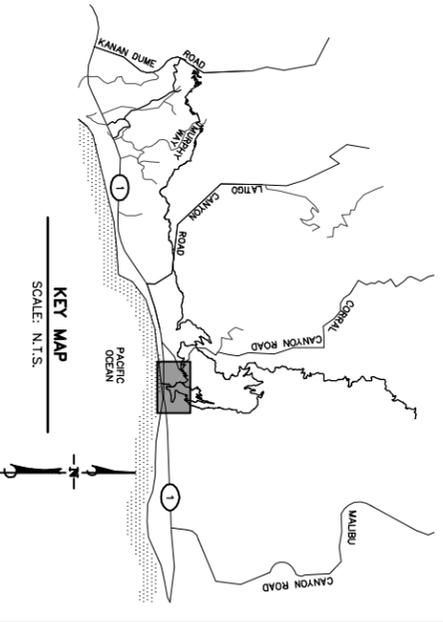

- LEGEND**
- W — PROPOSED WATER LINE
  - U — COMMON UTILITY TRENCH
  - FW — PROPOSED FIREWATER LINE
  - VEGETATION MANAGEMENT BOUNDARY
  - CREEK FLOW LINE
  - GRADED SLOPE
  - HOSE BIBB, HYDRANT OR STANDPIPE
  - PARKING AREA NUMBER
  - CONSTRUCTION NOTE NUMBER
  - DEMOLITION NOTE NUMBER
- CONSTRUCTION NOTES**
- 6 CONSTRUCT RESTROOM.
  - 11 CONSTRUCT PARKING AREA WITH 12" COMPACTED DECOMPOSED GRANITE (06) TO 95% OVER AGG. BASE SIMILAR TO DETAIL H ON SHEET 36.
  - 12 CONSTRUCT RETAINING WALL PER DETAIL D ON SHEET 35.
  - 15 CONSTRUCT 3" WATER LINE PER DETAIL K ON SHEET 36 AND CONNECT TO EXISTING WATER LINE.
  - 16 CONSTRUCT 3" WATER LINE PER DETAIL K ON SHEET 36 AND CONNECT TO EXISTING WATER LINE.
  - 18 CONSTRUCT 4" FIREWATER LINE PER DETAIL K ON SHEET 36.
  - 21 CONSTRUCT DRAINAGE SLUMP.
  - 23 INSTALL BIKE RACK. BIKE RACK SHALL BE GRID RACK 6400 SERIES GALVANIZED BY S&P'S OR APPROVED EQUIVALENT.
  - 28 CONSTRUCT COMMON UTILITY TRENCH PER DETAIL K ON SHEET 36.
  - 40 INSTALL FIRE TRUCK STORAGE SHED.
  - 42 INSTALL FIRE HYDRANT.
  - 43 INSTALL BACKFLOW PREVENTION DEVICE.
  - 46 CONSTRUCT 8" WIDE STABILIZED SOIL OR DECOMPOSED GRANITE TRAIL PER DETAIL N ON SHEET 36.
  - 55 CONSTRUCT WOODEN BOARD PRIVACY FENCE.
  - 56 CONSTRUCT PERMEABLE OR ASPHALT CONCRETE PAVEMENT AREA. USE OF PERMEABLE MATERIALS TO BE DETERMINED BASED ON FINAL SITE-SPECIFIC GEOTECHNICAL RECOMMENDATIONS.
  - 57 PROVIDE AND INSTALL CAMPING RESERVATION BOARD.
  - 60 INSTALL PREFABRICATED PARK ADMINISTRATION/EMPLOYEE QUARTERS.
  - 61 INSTALL SINGLE-SIDED PARK ENTRANCE SIGN AT LOCATION SHOWN.
  - 66 EXTEND EXISTING 10" OR 12" WATER MAIN IN ROAD RIGHT-OF-WAY TO PROVIDE WATER SERVICE TO PROJECT.
  - 70 CONSTRUCT PUMP STATION WITH (2) WELLY TANKS.
  - 71 CONSTRUCT 6" SIAMESE FIRE DEPARTMENT CONNECTION AND CHECK VALVE.
  - 72 CONSTRUCT 6" STANDPIPE (NET).
  - 73 CONSTRUCT 7" HIGH MASONRY WALL.
  - 76 ALTERNATE TO WATERLINE CONSTRUCTION IN PCH R/W. DIRECTIONAL DRILL WATERLINE BELOW CORRAL CANYON CREEK.