AREA 1

NOTE: SEE RAMIREZ CREEK RESTORATION/ENHANCEMENT PLANS FOR WORK WITHIN RAMIREZ CANYON CREEK.

SCALE: 1"=20'

0 20 40 60

LEGEND

- EXISTING CREEK
- RETAINING WALL
- SLOPE
- VEGETATION MANAGEMENT BOUNDARY

CONSTRUCTION NOTES

(10) CONSTRUCT PICNIC AREA.

(12) AS PART OF THE CREEK RESTORATION PLANS (SHEETS 53–63), CONSTRUCT RETAINING WALL PER DETAIL D ON SHEET 35.

(22) CONSTRUCT 2:1 CUT SLOPE OR 2:1 FILL SLOPE AS REQUIRED. FILL SLOPES GREATER THAN 3' VERTICAL SHALL BE KEYED AND BENCHED. PROTECT GRADED SLOPES FROM EROSION WITH LANDSCAPING OR OTHER EROSION CONTROL DEVICES.

(27) CONSTRUCT SMALL CAMPSITE TYPE 2 PER LOCATION AND GRADING SHOWN HERE ON. CONSTRUCT LAYOUT PER DETAIL M ON SHEET 36.

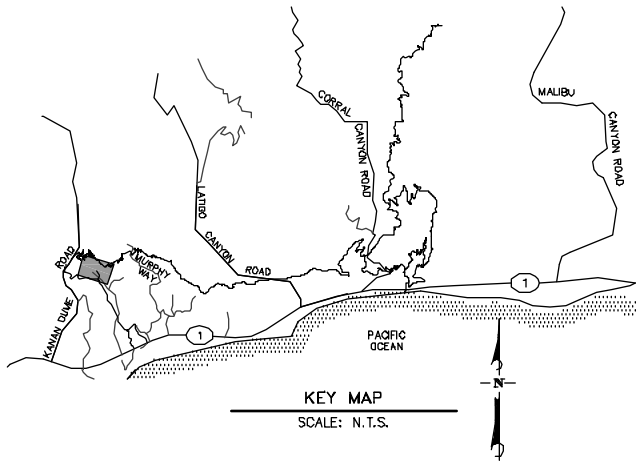

KEY MAP

SCALE: N.T.S.

CONCEPT - 2002 LCP ALTERNATIVE

DUDEK
621 CHAPALA STREET
SANTA BARBARA, CA 93101
(805) 963-0651

NO.	DATE	REVISIONS	APPD.

Penfield & Smith
Engineering • Surveying • Planning • Construction Management •
111 East Victoria Street, Santa Barbara, CA 93101
Phone: (805) 963-9532 Fax: (805) 966-9801

DESIGN JHC/TRG CHECKED BEF

BRET. E. FOSTER DATE:

PROJECT ENGINEER

R.C.E. 48,267 (EXP. 06-30-10)

AREA 1
RAMIREZ CANYON
SANTA MONICA MOUNTAINS CONSERVANCY
MALIBU, CALIFORNIA

P&S PROJECT NO. 1363B.05

SHEET 6 OF 63

PLAN DATE JANUARY 14, 2010

34-ENG SAVE DATE: 1/15/2010 8:09:30 AM PLOT BY: Bret Foster PLOT DATE: 1/15/2010 8:53:18 AM PLOT SCALE: 1:2.58
DRAWING: r:\acad\work\1363B\civil\2002 lcp alt 1-14-10\1363B_2002lcp_08-08_ramirez.dwg