CAMP AREA 2

LEGEND

- EXISTING CREEK
- RETAINING WALL
- SLOPE
- VEGETATION MANAGEMENT BOUNDARY

CONSTRUCTION NOTES

1. CONSTRUCT TRAIL OR IMPROVE EXISTING TRAIL TO MINIMUM 5' WIDE PER DETAIL C ON SHEET 35.
4. CONSTRUCT SMALL CAMPSITE TYPE 1 PER LOCATION AND GRADING SHOWN HERE ON. CONSTRUCT LAYOUT PER DETAIL B ON SHEET 35.
6. CONSTRUCT RESTROOM.
12. CONSTRUCT RETAINING WALL PER DETAIL D ON SHEET 35.
17. CONSTRUCT HOSE BIBB.
20. CONSTRUCT 4"± SEWER LINE PER DETAIL K ON SHEET 36 AND CONNECT TO EXISTING SEWER SYSTEM.
21. CONSTRUCT DRAINAGE SUMP.
23. INSTALL BIKE RACK. BIKE RACK SHALL BE GRID RACK 6400 SERIES GALVANIZED BY SARIS OR APPROVED EQUIVALENT.
31. CONSTRUCT FOOT BRIDGE.
37. CONSTRUCT 4"± PVC WATER LINE PER DETAIL K ON SHEET 38 AND CONNECT TO EXISTING WATER LINE.
49. INSTALL WILDLAND FIRE HYDRANT AND 100' FIRE HOSE WITH REEL PER DETAIL P ON SHEET 36.

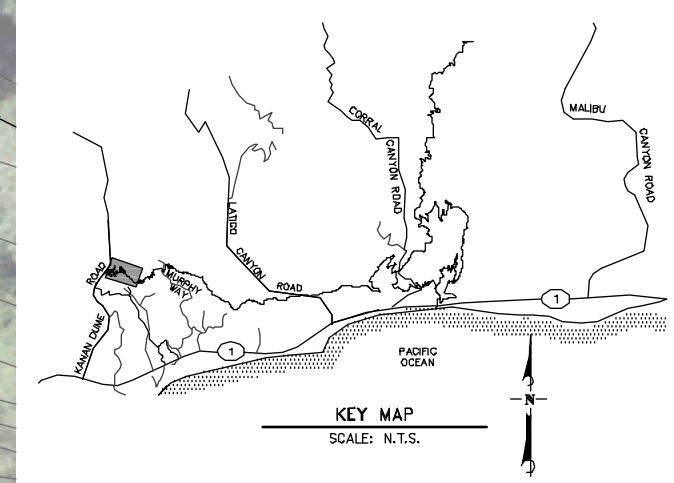

KEY MAP
SCALE: N.T.S.

SCALE: 1"=20'
0 20 40 60

CONCEPT - PROPOSED PROJECT

DUDEK
621 CHAPALA STREET
SANTA BARBARA, CA 93101
(805) 963-0651

NO.	DATE	REVISIONS	APPD.

Penfield & Smith
Engineering • Surveying • Planning • Construction Management •
111 East Victoria Street, Santa Barbara, CA 93101
Phone: (805) 963-9532 Fax: (805) 966-9801

DESIGN JHC/TRG CHECKED BEF
BRET. E. FOSTER DATE:
PROJECT ENGINEER
R.C.E. 48,267 (EXP. 06-30-10)

CAMP AREA 2
RAMIREZ CANYON
SANTA MONICA MOUNTAINS CONSERVANCY
MALIBU, CALIFORNIA

P&S PROJECT NO. 13638.05
SHEET 7 OF 63
PLAN DATE JANUARY 10, 2010

34-ENG SAVE DATE: 1/11/2010 8:13:25 AM PLOT BY: Bret Foster PLOT DATE: 1/11/2010 4:23:43 PM PLOT SCALE: 1:2.58
DRAWING: r:\acad\work\13638\civil\proposed proj 1-10-10\13638_prop_08-08_ramirez.dwg