CORRAL CANYON SITE IMPROVEMENTS EARTHWORK ESTIMATE

	CUT (C.Y)	FILL (C.Y.)	WALL LENGTH (FT)
CAMPING AREA	250	250	30
PARKING AREA	40	5	55
TANK	5	5	0
SUBTOTAL	295	260	85
20% CONTINGENCY	60	50	20
TOTAL	385	310	105

TRAIL EARTHWORK ESTIMATE

	CUT (C.Y)	FILL (C.Y.)	TRAIL LENGTH (FT)	WALL LENGTH (FT)
SOLSTICE TO CORRAL TRAIL	1,360	280	7,814	2,340
CORRAL NORTH TRAIL	3,960	830	23,794	11,110
OLD ROAD WEST TRAIL	270	60	1,484	200
CORRAL EASEMENT TRAIL	200	50	1,167	510
CORRAL NORTH LINK TRAIL	240	50	1,376	420
CORRAL CAMP TRAIL	810	170	840	840
CORRAL CAMP NORTH TRAIL	140	30	794	40
OLD ROAD EAST TRAIL	3,780	770	21,540	5,760
SUBTOTAL	10,760	2,240	–	21,220
20% CONTINGENCY	2,160	450	–	4,250
TOTAL	12,920	2,690	58,809	25,470

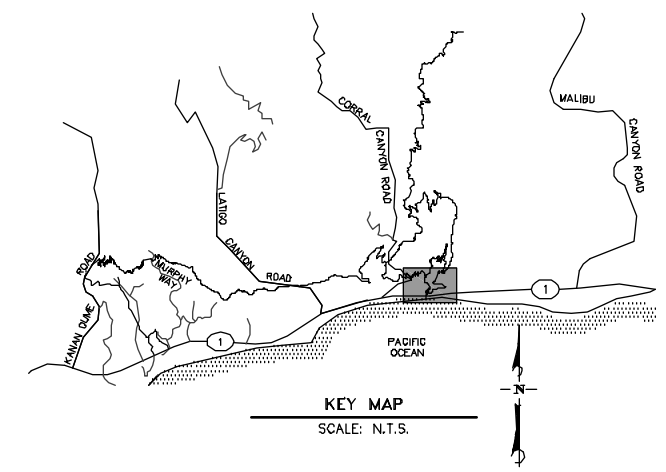

KEY MAP
SCALE: N.T.S.

N

SCALE: 1"=80'
0 80 160 240

CORRAL CANYON SITE PLAN

MALIBU PARKS PUBLIC ACCESS ENHANCEMENT PLAN
PUBLIC WORKS PLAN CONCEPT

FOR REDUCED PLANS ORIGINAL SCALE IN INCHES
0 1 2 3

DUDEK
621 CHAPALA STREET
SANTA BARBARA, CA 93101
(805) 963-0651

NO.	DATE	REVISIONS	APPD.

Penfield & Smith
Engineers • Surveyors • Planners • Construction Management •
111 East Victoria Street, Santa Barbara, CA 93101
Phone: (805) 963-9532 Fax: (805) 966-9801

DESIGN JHC/TRG CHECKED BEF
BRET FOSTER DATE:
PROJECT ENGINEER
R.C.E. 48,267 (EXP. 06-30-12)

ADOPTED ON AUGUST 23, 2010 BY SANTA MONICA MOUNTAINS CONSERVANCY AND MOUNTAINS RECREATION AND CONSERVATION AUTHORITY.

CERTIFIED ON _____
BY CALIFORNIA COASTAL COMMISSION.

SITE PLAN
CORRAL CANYON
SANTA MONICA MOUNTAINS CONSERVANCY
MALIBU, CALIFORNIA

P&S PROJECT NO. 13638.05
SHEET 25 OF 63
PLAN DATE AUGUST 25, 2010

34-ENG SAVE DATE: 7/23/2010 11:29:19 AM PLOT BY:Bret Foster PLOT DATE:8/25/2010 3:17:59 PM PLOT SCALE:1:10

DRAWING:r:\acad\work\13638\civil\3-mra\13638_mra_25_corral sp.dwg